




**MILBANK**<sup>®</sup>  
ENERGY AT WORK

## MS-14-TB

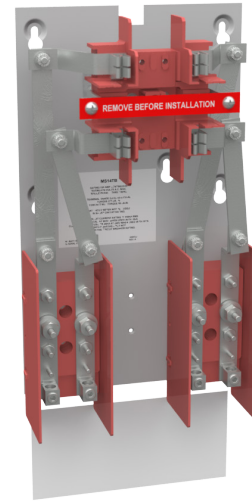

Catalog Number	MS-14-TB	Jaw Quantity	4 Terminal
Marketing Product Description	100 Ampere 4 Terminal Test Block	Bypass Type	Link Bypass
UPC	784572167049	Number of Meter Positions	1 Position
Length (IN)	4.53	Equipment Ground	No Equipment Ground
Width (IN)	9	Hub Opening	No Hub Opening
Height (IN)	15.5	Number Of Receptacles	0
Brand Name	Milbank		
Type	Ring Type Meter Socket		
Application	Meter Socket		
Standard	UL Listed;Type 3R		
Voltage Rating	Up to 240 Volts Alternating Current		
Amperage Rating	100 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.53L x 9W x 15.5H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Block and Bridge Only		
Terminal	Lay in		
Insulation	Fiberglass with Resin		
Mounting	Panel Mount		
Enclosure	Block and Bridge Only		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.