


400A Meter Main

Single & Three Phase



U6227-X-400-K3L

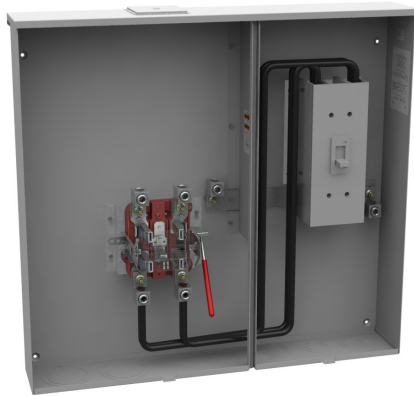

U6230-X-400-K7



U6115-X-2/200-K7L

Features

- **Safe & Secure**
 - Barrel lock provision (optional)
 - Easy outside access to main service disconnect in case of emergency
- **Easy Installation**
 - All-in-one enclosure reduces installation time, labor and errors
 - Wall hanging brackets included
 - Overhead/underground service entry
 - Accepts 3", 3^{1/2}" or 4" hub for overhead applications
 - Field-installed 5th terminal available (single-phase only; #K3865)
- **Durable Enclosure**
 - NEMA 3R rated
 - G90 galvanized steel, powder-coated paint protects against corrosion
- **Ideal for large homes, small office and commercial buildings**
- **Heavy duty lever bypass meter socket**
- **One 400A breaker (1Ø or 3Ø units available)**
- **UL Listed**
- **Made in the USA**

Additional Features - U6115 & U6416

- **Two 200A breakers**
- **U6416** is side bussed

Common Applications



Large Homes



Small Office & Commercial Buildings

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



400A Meter Main

Single & Three Phase

400 Amp Meter Main | 4 & 5 Terminal | 1Ø3W | 240 VAC

Catalog Number	Terminals	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
				Line	D"	W"	H"	1	2	3	4
U6227-X-400-K3L	4	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6227-X-400-K3L-5T6	5	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6227-X-400-K3L-5T9	5	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6228-X-400-K3L	4	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6228-X-400-K3L-5T6	5	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6228-X-400-K3L-5T9	5	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼

Specifications

- Side Buss Units: U6228
- AIC Rating : **22K AIC at 240V**
- 300 Amp breaker: Can be installed from the factory (upon request)

400 Amp Meter Main | 7 Terminal | 3Ø4W | 480 VAC

Catalog Number	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
			Line	D"	W"	H"	1	2	3	4
U6229-X-400-K7L	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6230-X-400-K7L	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼

400 Amp Meter Main with (2) 200 Amp Breakers | 7 Terminal | 3Ø4W | Ringless | 480 VAC

Catalog Number	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
			Line	D"	W"	H"	1	2	3	4
U6115-X-2/200-K7L	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	7	37¼	34	4	2½	½	¼
U6416-X-2/200-K3L	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	7	34¼	34	4	2½	½	¼

Specifications

- Side Buss Units: U6230 & U6416
- AIC Rating: **22K AIC at 240V**. And 10K AIC at 480V
- 300 Amp breaker: Can be installed from the factory (upon request)

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

