




Meter Main Pedestals

U6220, U6221 & U6226 Series

U6434, U6435 & U6436 Series



U6221 installation in Gambills, Maryland.

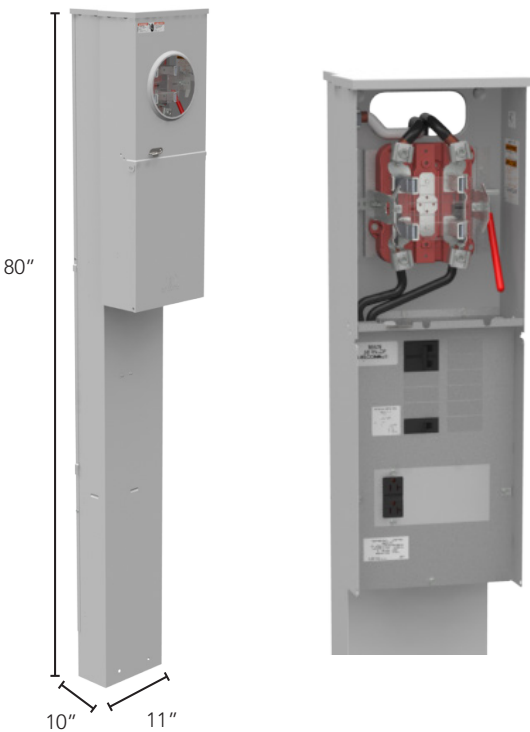

Potential Applications



Mobile home park needs power distribution with more receptacles.

Ideal for **mobile homes or RV parks** that have a need for more branch circuits. The U6221 has a slender footprint and offers a defined wireway for the utility line side wire, separate from the end user side. These loads are each metered individually by the local utility.



DOT needs compact power distribution.

A **Department of Transportation (DOT)** was looking for a solution to distribute power to their **traffic lights and signals**. Milbank and a local rep worked with the DOT and a local utility to provide a more compact solution.



Small commercial business needs freestanding single-tenant power distribution.

Milbank offers several types of meters and meter mains for **commercial businesses**. The U6221 is ideal for a small, freestanding business that may need to **distribute power** to external lighting or signs.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Meter Main Pedestals

U6220, U6221 & U6226 Series

U6434, U6435 & U6436 Series

Features

- UL listed
- NEMA 3R construction for outdoor use
- Available with up to 3 receptacles field or factory installed.
- One-piece post -- lockable and sealable
- Short circuit rating of 22K AIC
- 12 total branch circuits available
 - 8 branch circuits for 200 Amps service
 - 10 branch circuits for 100 Amps service

4 Terminal | Meter Main Pedestal | Ringless

Catalog Number	Service	Mounting	Meter Positions	Main CB	Branch Circuits	Bypass	Connectors CU/AL		Knockouts		
							Line	Load	1	2	3
U6220-O-100-10GR	UG	Direct Burial	Single	100A	10	Horn	#6-350	CB	2	½	¼
U6220-O-200-10GR	UG	Direct Burial	Single	200A	8	Horn	#6-350	CB	2	½	¼
U6434-O-200-10GR	UG	Pad Mount	Single	200A	8	Horn	#6-350	CB	2	½	¼

4 Terminal | Meter Main Pedestal | Heavy Duty Lever Bypass Ringless

Catalog Number	Service	Mounting	Meter Positions	Main CB	Branch Circuits	Bypass	Connectors CU/AL		Knockouts		
							Line	Load	1	2	3
U6221-O-100-10GR	UG	Direct Burial	Single	100A	10	Lever	#6-350	CB	2	½	¼
U6221-O-200-10GR	UG	Direct Burial	Single	200A	8	Lever	#6-350	CB	2	½	¼
U6435-O-200-10GR	UG	Pad Mount	Single	200A	8	Lever	#6-350	CB	2	½	¼

4 Terminal | Meter Main Pedestal | Ring Type

Catalog Number	Service	Mounting	Meter Positions	Main CB	Branch Circuits	Bypass	Connectors CU/AL		Knockouts		
							Line	Load	1	2	3
U6226-O-100-10GR	UG	Direct Burial	Single	100A	10	None	#6-350	CB	2	½	¼
U6226-O-200-10GR	UG	Direct Burial	Single	200A	8	None	#6-350	CB	2	½	¼
U6436-O-200-10GR	UG	Pad Mount	Single	200A	8	None	#6-350	CB	2	½	¼

Common Applications



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.