

Underground Termination Boxes

600 VAC | PG&E Approved



PB-034



PB-018



PB-014

Underground Termination Boxes | 600 VAC

Catalog Number	Amps	Type of Service	Connectors CU/AL		Dimensions				Short Circuit Current Withstand Rating
			Line	Load	D"	W"	H"	X"	
PB-014* PB-014-NK	400	1Ø3W	½"x13 Studs	#4-600 Twin 1/0-250	6	16	36	22	50K Amps
PB-034* PB-034-NK	400	3Ø4W	½"x13 Studs*	#4-600 Twin 1/0-250	6	16	36	22	50K Amps
PB-016*	600	1Ø3W	½"x13 Studs*	#4-600 Twin 1/0-250	11	24	48	26	50K Amps
PB-018* PB-018-NK	800	1Ø3W	½"x13 Studs*	#4-600 Twin 1/0-250	11	24	48	26	50K Amps

Notes


- **Connectors and Bussing:** Extruded aluminum connectors and bus bars are tin plated.
- For no knockouts, add suffix -NK to the above catalog numbers.
- * Two studs per lug position provided for 400 Amps units. Four studs per lug position provided for 800 Amps units.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Current Transformer Cabinets

Mounting Racks

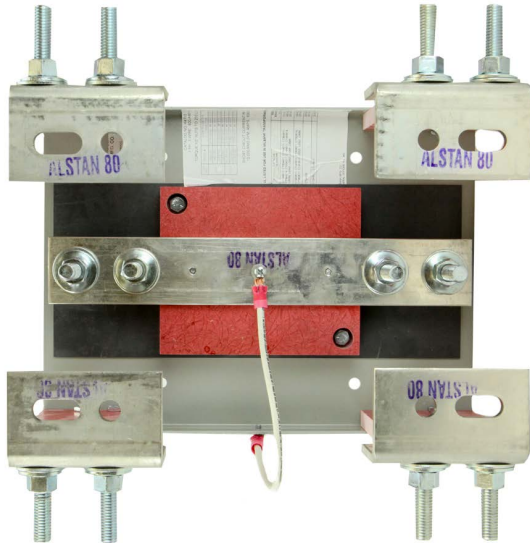

K4793



K4794

Current Transformer Enclosure Mounting Racks

Catalog Number	Code	AIC Rating	Amps	Volts	Type of Service	Termination Type
K4793	C	10K	201-400	600	1Ø3W	1/2 x 13 Studs on 1-3/4" Centers
K4794	E	10K	201-400	600	3Ø4W	1/2 x 13 Studs on 1-3/4" Centers
K6497	A4	50K	400	600	1Ø3W	1/2 x 13 Studs on 1-3/4" Centers
K6498	B4	50K	400	600	3Ø4W	1/2 x 13 Studs on 1-3/4" Centers
K6494	J	50K	600	600	1Ø3W	(1) #4 - 600 or (2) #1 - 250

Note

- Match red code letter with the applicable CT Cabinet on pages 61 & 62 of the Western Region Catalog.
- **1/2" Lug Kit:** order **K4200** (single, #4-600) or **K4223** (double, #6-350). Each Kit contains four connectors.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

PG&E Approved Applications

Pull Boxes | CT Racks

Pull Boxes

Catalog Number	Commercial Applications	Residential Applications	Phase	Amps
PB-014	x	x	1	400
PB-034	x	x	3	400
PB-016	x	x	1	600
PB-018		x	1	800

Combo Unit CT Racks

Catalog Number	Commercial Applications	Residential Applications	Phase	Amps	SCCR	Overhead/Underground
K6497	x	x	1	400	50K	OH/UG
K6498	x	x	3	400	50K	OH/UG
K4793	x	x	1	400	10K	OH/UG
K4794	x	x	3	400	10K	OH/UG
K6494	x	x	1	600	50K	OH only

CT Cabinet CT Racks

Catalog Number	Commercial Applications	Residential Applications	Phase	Amps	SCCR	Overhead/Underground
K6497	x	x	1	400	50K	OH/UG
K6498	x	x	3	400	50K	OH/UG
K4793	x	x	1	400	10K	OH/UG
K4794	x	x	3	400	10K	OH/UG
K6494	x	x	1	600	50K	OH only

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

