




MILBANK[®]
ENERGY AT WORK

U4667-XT-BAR-9572

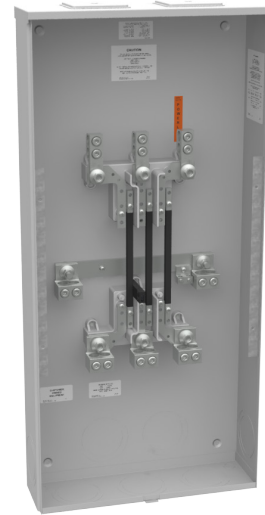

Catalog Number	U4667-XT-BAR-9572	Mounting	Surface Mount
Marketing Product Description	7 Terminal Bolt-in 2 Large Closing Plates Link Bypass 3-double Connector 2-500kcmil 5-double Connector 4-500kcmil	Enclosure	G90 Galvanized Steel with Powder Coat Finish
UPC	784572256293	Jaw Quantity	7 Terminal
Length (IN)	6	Bypass Type	Link Bypass
Width (IN)	20.25	Number of Meter Positions	1 Position
Height (IN)	43	Equipment Ground	Triplex Ground
Brand Name	Milbank	Hub Opening	Twin Large Closing Plates
Type	Bolt On Meter Socket	Number Of Receptacles	0
Application	Meter Socket		
Standard	UL Listed;Type 3R		
Voltage Rating	600 Volts Alternating Current		
Amperage Rating	480 Continuous Ampere		
Phase	3 Phase		
Frequency Rating	60 Hertz		
Size	6L x 20.25W x 43H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead or Underground		
Terminal	1/2 Inch Stud Line Side		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.