




MILBANK
ENERGY AT WORK

UF4969-KO

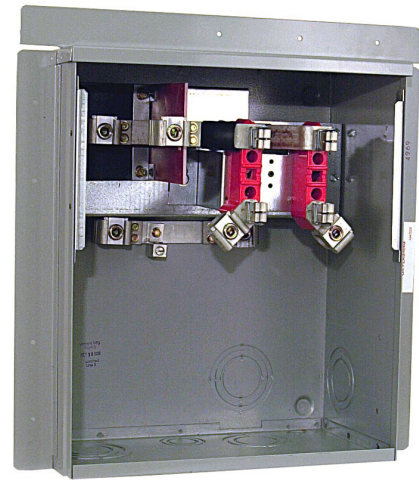

| | |
|-------------------------------|---|
| Catalog Number | UF4969-KO |
| Marketing Product Description | 4 Terminal Ring Type Flush Mt W-flange Knockouts Switch Underground |
| UPC | 784572269958 |
| Length (IN) | 7.5 |
| Width (IN) | 17.18 |
| Height (IN) | 17.9 |
| Brand Name | Milbank |
| Type | Ring Type Meter Socket |
| Application | Meter Socket |
| Standard | UL Listed;Type 3R |
| Voltage Rating | 600 Volts Alternating Current |
| Amperage Rating | 200 Continuous Ampere |
| Phase | 1 Phase |
| Frequency Rating | 60 Hertz |
| Size | 7.5L x 17.18W x 17.9H |
| Number Of Cutouts | 0 |
| Cutout Size | No Main Breaker |
| Cable Entry | Underground |
| Terminal | Single Mechanical |
| Insulation | Glass Polyester |
| Mounting | Surface Mount |

| | |
|---------------------------|----------------------------------|
| Enclosure | Aluminum with Powder Coat Finish |
| Jaw Quantity | 4 Terminal |
| Bypass Type | No Bypass |
| Number of Meter Positions | 1 Position |
| Equipment Ground | Ground Lug |
| Hub Opening | Plain Top |
| Line Side Wire Range | 6 AWG - 350 kcmil |
| Load Side Wire Range | 6 AWG - 350 kcmil |
| Number Of Receptacles | 0 |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.