




MILBANK
ENERGY AT WORK

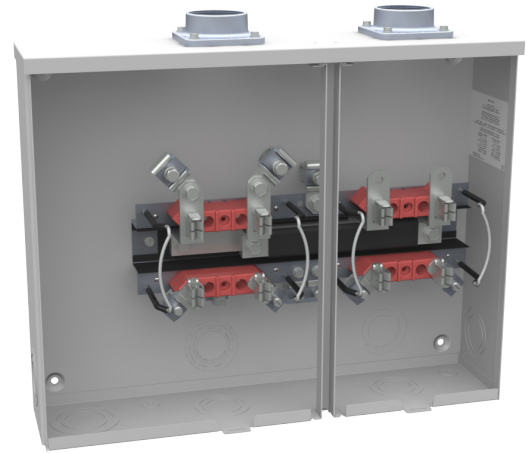

U8212-DL

| | | | |
|-------------------------------|--|---------------------------|-------------------|
| Catalog Number | U8212-DL | Jaw Quantity | 4 Terminal |
| Marketing Product Description | 4 Terminal Ringless 2 In Hub 2 Position Wide Shell | Bypass Type | No Bypass |
| UPC | 784572142145 | Number of Meter Positions | 2 Positions |
| Length (IN) | 4.5 | Equipment Ground | Ground Lug |
| Width (IN) | 20.313 | Hub Opening | 2 Inch Hub |
| Height (IN) | 16 | Line Side Wire Range | 6 AWG - 350 kcmil |
| Brand Name | Milbank | Load Side Wire Range | 6 - 2/0 AWG |
| Type | Ringless Meter Socket | Number Of Receptacles | 0 |
| Application | Meter Socket | | |
| Standard | UL Listed;Type 3R | | |
| Voltage Rating | 300 Volts Alternating Current | | |
| Amperage Rating | 100 Continuous Ampere | | |
| Phase | 1 Phase | | |
| Frequency Rating | 60 Hertz | | |
| Size | 4.5L x 20.313W x 16H | | |
| Number Of Cutouts | 0 | | |
| Cutout Size | No Main Breaker | | |
| Cable Entry | Overhead or Underground | | |
| Terminal | Lay in | | |
| Insulation | Glass Polyester | | |
| Mounting | Surface Mount | | |
| Enclosure | G90 Galvanized Steel with Powder Coat Finish | | |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.