




MILBANK
ENERGY AT WORK

CP3B12513A

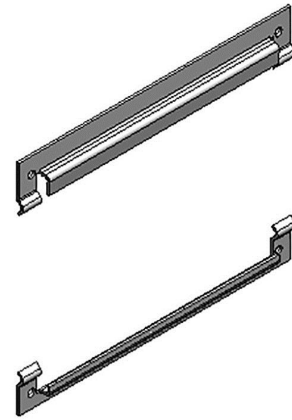

Catalog Number	CP3B12513A
Marketing Product Description	Ring Type 200 Amperes 208y 7 Terminal Main Circuit Breaker 12 Circuit Loadcenter Mint Green
UPC	784572207332
Length (IN)	17
Width (IN)	16
Height (IN)	48
Brand Name	Milbank
Type	Ring Type Metered Commercial Pedestal
Application	Power Distribution
Standard	UL Listed;Type 3R
Voltage Rating	120/208 Volts Alternating Current
Amperage Rating	200 Continuous Ampere
Phase	3 Phase
Frequency Rating	60 Hertz
Size	17L x 16W x48H
Number Of Cutouts	1
Cutout Size	One 200 Ampere Main Breaker
Cable Entry	Underground
Terminal	Single Mechanical

Insulation	No Insulation
Mounting	Pad Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	Link Bypass
Number of Meter Positions	1 Position
Equipment Ground	Ground Bar
Hub Opening	No Hub Opening
Line Side Wire Range	4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil
Load Center	12 Circuit Load Center
Number Of Receptacles	0

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.