




MILBANK[®]
ENERGY AT WORK

U3251-O-200-CB

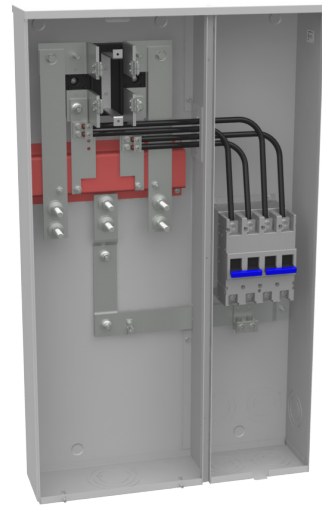

Catalog Number	U3251-O-200-CB	Mounting	Surface Mount
Marketing Product Description	4 Terminal Ring Type Plain Top 1-200 Ampere Main Breaker Bypass Studs	Enclosure	G90 Galvanized Steel with Powder Coat Finish
UPC	784572137455	Jaw Quantity	4 Terminal
Length (IN)	6	Bypass Type	Link Bypass
Width (IN)	23.813	Number of Meter Positions	1 Position
Height (IN)	39.938	Equipment Ground	2 Barrel Ground Lug
Brand Name	Milbank	Hub Opening	Plain Top
Type	Ring Type Meter Socket	Load Side Wire Range	1 AWG - 300 kcmil
Application	Meter Socket With Main	Number Of Receptacles	0
Standard	UL Listed;Type 3R		
Voltage Rating	Up to 240 Volts Alternating Current		
Amperage Rating	320 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	6L x 23.813W x 39.938H		
Number Of Cutouts	2		
Cutout Size	Two 200 Ampere Main Breakers		
Cable Entry	Underground with Side Wireway		
Terminal	1/2 Inch Stud Line Side		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.