




MILBANK
ENERGY AT WORK

U5101-XL-100MB-11GR

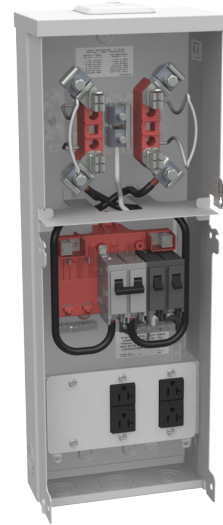

Catalog Number	U5101-XL-100MB-11GR	Mounting	Surface Mount
Marketing Product Description	4 Terminal Ringless Small Closing Plate 1-100 Ampere Main Breaker 520GR 520GR Surface Mount	Enclosure	G90 Galvanized Steel with Powder Coat Finish
UPC	784572279575	Jaw Quantity	4 Terminal
Length (IN)	5.186	Bypass Type	No Bypass
Width (IN)	8.875	Number of Meter Positions	1 Position
Height (IN)	25	Equipment Ground	Ground Bar
Brand Name	Milbank	Hub Opening	Small Closing Plate
Type	Ringless Meter Socket	Line Side Wire Range	6 AWG - 350 kcmil
Application	Temporary Power	Number Branch Circuits	6
Standard	UL Listed;Type 3R	Number Of Receptacles	2
Voltage Rating	Up to 240 Volts Alternating Current	Receptacle Configuration	Two NEMA 5-20 Ground Fault
Amperage Rating	100 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	5.186L x 8.875W x 25H		
Number Of Cutouts	2		
Cutout Size	Breaker Provision		
Cable Entry	Overhead or Underground		
Terminal	Lay in		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.