




MILBANK
ENERGY AT WORK

U5101-XL-55

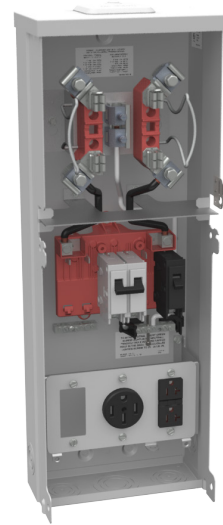

Catalog Number	U5101-XL-55	Terminal	Lay in
Marketing Product Description	4 Terminal Ringless Small Closing Plate 1450 520GR Surface Mount	Insulation	Glass Polyester
UPC	784572311084	Mounting	Surface Mount
Length (IN)	5.188	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Width (IN)	8.875	Jaw Quantity	4 Terminal
Height (IN)	25	Bypass Type	No Bypass
Brand Name	Milbank	Number of Meter Positions	Single Power Head
Type	Ringless Meter Socket	Equipment Ground	Ground Bar
Special Features	One Single Pole 20 Ampere Breaker and One Double Pole 50 Ampere Breaker	Hub Opening	Small Closing Plate
Application	RV Power	Line Side Wire Range	6 AWG - 350 kcmil
Standard	UL Listed;Type 3R	Number Branch Circuits	3
Voltage Rating	Up to 240 Volts Alternating Current	Number Of Receptacles	2
Amperage Rating	125 Continuous Ampere	Receptacle Configuration	One NEMA 14-50 and One NEMA 5-20 Ground Fault
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	5.188L x 8.875W x 25H		
Number Of Cutouts	2		
Cutout Size	One Single Pole 20 Ampere Breaker and One Double Pole 50 Ampere Breaker		
Cable Entry	Overhead or Underground		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.