




U5073-X-K3L-K2L-LIS

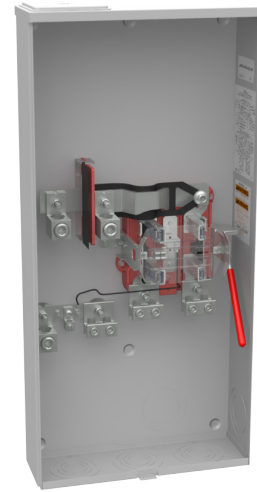

Catalog Number	U5073-X-K3L-K2L-LIS	Terminal	Single Mechanical
Marketing Product Description	5 Terminal Ringless Large Closing Plate Lever Bypass Single Connector Locking 4-600kcmil Double Connector Locking 6-350kcmil Long Island Lighting Company	Insulation	Glass Polyester
UPC	784572311176	Mounting	Surface Mount
Length (IN)	4.844	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Width (IN)	15	Jaw Quantity	4 Terminal
Height (IN)	31.5	Bypass Type	Lever Bypass
Brand Name	Milbank	Number of Meter Positions	1 Position
Type	Ringless Meter Socket	Equipment Ground	Ground Lug
Special Features	Long Island Lighting Company	Hub Opening	Large Closing Plate
Application	Meter Socket	Line Side Wire Range	4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil
Standard	UL Listed;Type 3R	Load Side Wire Range	Two 6 AWG - 350 kcmil
Voltage Rating	600 Volts Alternating Current	Number Of Receptacles	0
Amperage Rating	320 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 15W x 31.5H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead and Underground and Side Wireway		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.