




**MILBANK**  
ENERGY AT WORK

## U5100-XL-552GR

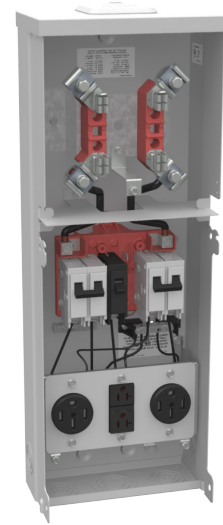

Catalog Number	U5100-XL-552GR
Marketing Product Description	4 Terminal Ring Type Small Closing Plate 1450 1450 520GR Surface Mount
UPC	784572472051
Length (IN)	5.188
Width (IN)	8.875
Height (IN)	25
Brand Name	Milbank
Type	Ring Type Meter Socket
Special Features	One Single Pole 20 Ampere Breaker and Two Double Pole 50 Ampere Breaker
Application	RV Power
Standard	UL Listed;Type 3R
Voltage Rating	Up to 240 Volts Alternating Current
Amperage Rating	125 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	5.188L x 8.875W x 25H
Number Of Cutouts	3
Cutout Size	One Single Pole 20 Ampere Breaker and Two Double Pole 50 Ampere Breakers
Cable Entry	Overhead or Underground

Terminal	Lay in
Insulation	Glass Polyester
Mounting	Surface Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	No Bypass
Number of Meter Positions	Single Power Head
Equipment Ground	Ground Bar
Hub Opening	Small Closing Plate
Line Side Wire Range	6 AWG - 350 kcmil
Number Branch Circuits	1
Number Of Receptacles	3
Receptacle Configuration	Two NEMA 14-50 and One NEMA 5-20 Ground Fault

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.