




MILBANK
ENERGY AT WORK

U5098-XL-200S-KK-10GR

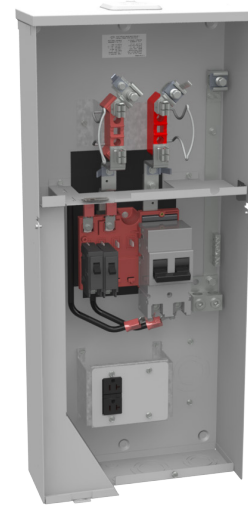

Catalog Number	U5098-XL-200S-KK-10GR	Mounting	Surface Mount
Marketing Product Description	4 Terminal Ringless Small Closing Plate Horn Bypass 1-200 Ampere Main Breaker 520GR	Enclosure	G90 Galvanized Steel with Powder Coat Finish
UPC	784572320895	Jaw Quantity	4 Terminal
Length (IN)	5.5	Bypass Type	Horn Bypass
Width (IN)	14	Number of Meter Positions	1 Position
Height (IN)	32	Equipment Ground	2 Barrel Ground Lug
Brand Name	Milbank	Hub Opening	Small Closing Plate
Type	Ringless Meter Socket	Line Side Wire Range	6 AWG - 350 kcmil
Application	Meter Socket	Load Side Wire Range	1/0 AWG - 300 kcmil
Standard	UL Listed;Type 3R	Number Of Receptacles	1
Voltage Rating	Up to 240 Volts Alternating Current	Receptacle Configuration	One NEMA 5-20 Ground Fault
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	5.5L x 14W x 32H		
Number Of Cutouts	1		
Cutout Size	One 200 Ampere Main Breaker		
Cable Entry	Underground		
Terminal	Lay in		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.