




U5101-RL-38GBGR-KK-5T

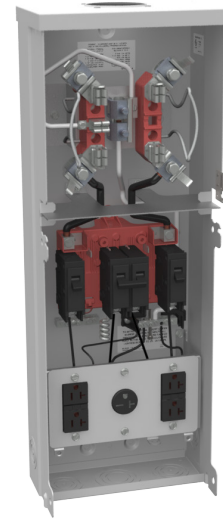

Catalog Number	U5101-RL-38GBGR-KK-5T
Marketing Product Description	5 Terminal Ringless Small Hub Open Horn Bypass 1-100 Ampere Main Breaker 520GR 620GB 520GR Surface Mount
UPC	784572371521
Length (IN)	5.188
Width (IN)	8.875
Height (IN)	25
Brand Name	Milbank
Type	Ringless Meter Socket
Special Features	Two Single Pole 20 Ampere Breakers and One Double Pole 20 Ampere Ground Fault Breaker
Application	RV Power
Standard	UL Listed;Type 3R
Voltage Rating	Up to 240 Volts Alternating Current
Amperage Rating	125 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	5.188L x 8.875W x 25H
Number Of Cutouts	3

Cutout Size	Two Single Pole 20 Ampere Breakers and One Double Pole 20 Ampere Ground Fault Breaker
Cable Entry	Overhead or Underground
Terminal	Lay in
Insulation	Glass Polyester
Mounting	Surface Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	5 Terminal
Bypass Type	Horn Bypass
Number of Meter Positions	Single Power Head
Equipment Ground	Ground Bar
Hub Opening	Small Hub Opening
Line Side Wire Range	6 AWG - 350 kcmil
Number Branch Circuits	2
Number Of Receptacles	3
Receptacle Configuration	Two NEMA 5-20 Ground Fault and One NEMA 6-20

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.