




MILBANK
ENERGY AT WORK

U5059-X-K3L

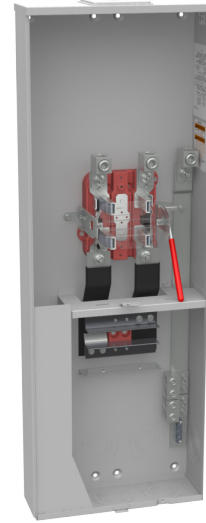

| | | | |
|-------------------------------|--|---------------------------|--|
| Catalog Number | U5059-X-K3L | Mounting | Surface Mount |
| Marketing Product Description | 4 Terminal Ringless Large Closing Plate 2-main Breaker Provision Single Connector Locking 4-600kcmil | Enclosure | G90 Galvanized Steel with Powder Coat Finish |
| UPC | 784572371248 | Jaw Quantity | 4 Terminal |
| Length (IN) | 4.844 | Bypass Type | Lever Bypass |
| Width (IN) | 15 | Number of Meter Positions | 1 Position |
| Height (IN) | 42.438 | Equipment Ground | Ground Bar |
| Brand Name | Milbank | Hub Opening | Large Closing Plate |
| Type | Ringless Meter Socket | Line Side Wire Range | 4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil |
| Application | Meter Socket With Main | Number Branch Circuits | 2 |
| Standard | UL Listed;Type 3R | Number Of Receptacles | 0 |
| Voltage Rating | Up to 240 Volts Alternating Current | | |
| Amperage Rating | 320 Continuous Ampere | | |
| Phase | 1 Phase | | |
| Frequency Rating | 60 Hertz | | |
| Size | 4.844L x 15W x 42.438H | | |
| Number Of Cutouts | 0 | | |
| Cutout Size | Breaker Provision | | |
| Cable Entry | Overhead or Underground | | |
| Terminal | Single Mechanical | | |
| Insulation | Glass Polyester | | |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.