




**MILBANK**  
ENERGY AT WORK

## U5059-X-2/150-K3L

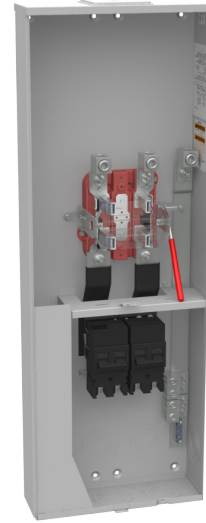

Catalog Number	U5059-X-2/150-K3L	Mounting	Surface Mount
Marketing Product Description	4 Terminal Ringless Large Closing Plate 2-150 Ampere Main Breaker Single Connector Locking 4-600kcmil	Enclosure	G90 Galvanized Steel with Powder Coat Finish
UPC	784572470521	Jaw Quantity	4 Terminal
Length (IN)	4.844	Bypass Type	Lever Bypass
Width (IN)	15	Number of Meter Positions	1 Position
Height (IN)	42.438	Equipment Ground	Ground Bar
Brand Name	Milbank	Hub Opening	Large Closing Plate
Type	Ringless Meter Socket	Line Side Wire Range	4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil
Application	Meter Socket With Main	Load Side Wire Range	1 AWG - 300 kcmil
Standard	UL Listed;Type 3R	Number Of Receptacles	0
Voltage Rating	Up to 240 Volts Alternating Current		
Amperage Rating	320 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 15W x 42.438H		
Number Of Cutouts	2		
Cutout Size	Two 150 Ampere Main Breakers		
Cable Entry	Overhead or Underground		
Terminal	Single Mechanical		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.