




**MILBANK**  
ENERGY AT WORK

## U2448-X-CPSB

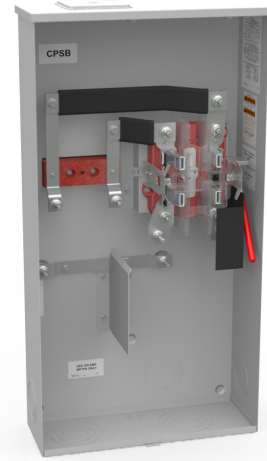

Catalog Number	U2448-X-CPSB	Insulation	Glass Polyester
Marketing Product Description	4 Terminal Ringless Large Closing Plate Lever Bypass City Public Service Board Of San Antonio	Mounting	Surface Mount
UPC	784572485419	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	6.5	Jaw Quantity	4 Terminal
Width (IN)	17.75	Bypass Type	Lever Bypass
Height (IN)	34.125	Number of Meter Positions	1 Position
Brand Name	Milbank	Equipment Ground	Ground Lug
Type	Ringless Meter Socket	Hub Opening	Large Closing Plate
Special Features	City Public Service Board of San Antonio	Number Of Receptacles	0
Application	Meter Socket		
Standard	UL Listed;Type 3R		
Voltage Rating	600 Volts Alternating Current		
Amperage Rating	320 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	6.5L x 17.75W x 34.125H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead or Underground		
Terminal	3/8 Inch Stud		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.