




MILBANK
ENERGY AT WORK

U1252-X-KK-K1-ALT

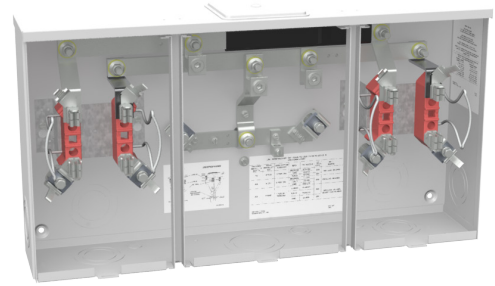

| | | | |
|-------------------------------|---|---------------------------|--|
| Catalog Number | U1252-X-KK-K1-ALT | Mounting | Surface Mount |
| Marketing Product Description | 4 Terminal Ringless Large Closing Plate Horn Bypass 2 Position Single Connector 6-350kcmil Alliant Energy | Enclosure | G90 Galvanized Steel with Powder Coat Finish |
| UPC | 784572496187 | Jaw Quantity | 4 Terminal |
| Length (IN) | 5.125 | Bypass Type | Horn Bypass |
| Width (IN) | 26.5 | Number of Meter Positions | 2 Positions |
| Height (IN) | 14 | Equipment Ground | Ground Lug |
| Brand Name | Milbank | Hub Opening | Large Closing Plate |
| Type | Ringless Meter Socket | Line Side Wire Range | 6 AWG - 350 kcmil |
| Application | Meter Socket | Load Side Wire Range | 6 AWG - 350 kcmil |
| Standard | UL Listed;Type 3R | Number Of Receptacles | 0 |
| Voltage Rating | 300 Volts Alternating Current | | |
| Amperage Rating | 200 Continuous Ampere | | |
| Phase | 1 Phase | | |
| Frequency Rating | 60 Hertz | | |
| Size | 5.125L x 26.5W x 14H | | |
| Number Of Cutouts | 0 | | |
| Cutout Size | No Main Breaker | | |
| Cable Entry | Overhead or Underground with Center Wireway | | |
| Terminal | Single Mechanical | | |
| Insulation | Glass Polyester | | |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.