




**MILBANK**  
ENERGY AT WORK

## USS4801-O-5T9

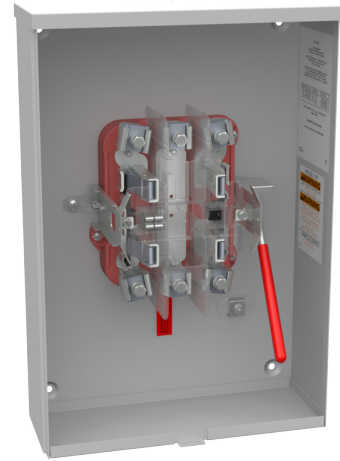

Catalog Number	USS4801-O-5T9	Enclosure	Unpainted 304 Stainless Steel
Marketing Product Description	5 Terminal Ringless Plain Top Lever Bypass 5th Terminal 9 O'clock Position Stainless Steel	Jaw Quantity	5 Terminal
UPC	784572527676	Bypass Type	Lever Bypass
Length (IN)	4.844	Number of Meter Positions	1 Position
Width (IN)	13	Equipment Ground	Bonded Ground Strap
Height (IN)	19	Hub Opening	Plain Top
Brand Name	Milbank	Line Side Wire Range	6 AWG - 350 kcmil
Type	Ringless Meter Socket	Load Side Wire Range	6 AWG - 350 kcmil
Application	Meter Socket	Number Of Receptacles	0
Standard	UL Listed;Type 3R		
Voltage Rating	600 Volts Alternating Current		
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 13W x 19H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Underground		
Terminal	Lay in		
Insulation	Glass Polyester		
Mounting	Surface Mount		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.