




MILBANK
ENERGY AT WORK

U4363-F-K1-K2

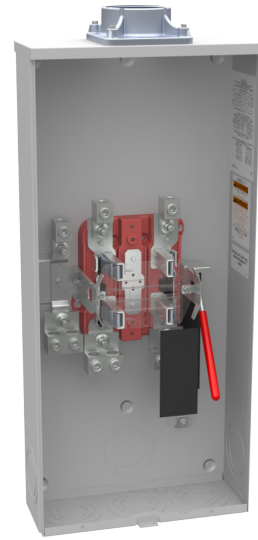

Catalog Number	U4363-F-K1-K2	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Marketing Product Description	4 Terminal Ringless 3 In Hub Lever Bypass Single Connector 6-350kcmil Single Connector 6-350kcmil	Jaw Quantity	4 Terminal
UPC	784572603677	Bypass Type	Lever Bypass
Length (IN)	4.844	Number of Meter Positions	1 Position
Width (IN)	13	Equipment Ground	Ground Lug
Height (IN)	28.25	Hub Opening	3 Inch Hub
Brand Name	Milbank	Line Side Wire Range	6 AWG - 350 kcmil
Type	Ringless Meter Socket	Load Side Wire Range	6 AWG - 350 kcmil
Application	Meter Socket	Number Of Receptacles	0
Standard	UL Listed;Type 3R		
Voltage Rating	600 Volts Alternating Current		
Amperage Rating	320 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 13W x 28.25H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead or Underground		
Terminal	Single Mechanical		
Insulation	Glass Polyester		
Mounting	Surface Mount		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.