




MILBANK[®]
ENERGY AT WORK

U1255-RXL-KK-K1-BLG-SLVG

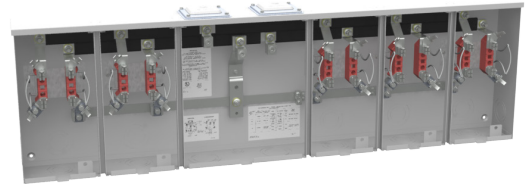

Catalog Number	U1255-RXL-KK-K1-BLG-SLVG	Insulation	Glass Polyester
Marketing Product Description	4 Terminal Ringless Large Hub Open Adapt To Small Closing Plate Horn Bypass 5 Position Single Connector 6-350kcmil 7-8 In Barrel Lock With Bracket Provision Buss Insulator Sleeve	Mounting	Surface Mount
UPC	784572706279	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	5.125	Jaw Quantity	4 Terminal
Width (IN)	54.688	Bypass Type	Horn Bypass
Height (IN)	16	Number of Meter Positions	5 Positions
Brand Name	Milbank	Equipment Ground	Ground Lug
Type	Ringless Meter Socket	Hub Opening	Large Hub Opening Adapted to Small Closing Plate
Application	Meter Socket	Line Side Wire Range	6 AWG - 350 kcmil
Standard	UL Listed;Type 3R	Load Side Wire Range	6 AWG - 350 kcmil
Voltage Rating	300 Volts Alternating Current	Barrel Lock Provision	7/8 Inch Knockout and Angle Bracket For Barrel Lock Provision
Amperage Rating	200 Continuous Ampere	Number Of Receptacles	0
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	5.125L x 54.688W x 16H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead or Underground with Center Wireway		
Terminal	Single Mechanical		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.