




MILBANK
ENERGY AT WORK

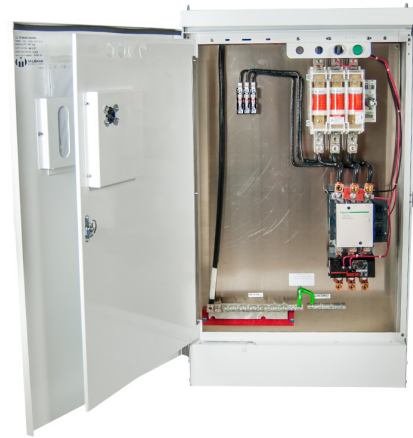

CP3B0281UMWIR04

Catalog Number	CP3B0281UMWIR04	Insulation	No Insulation
Marketing Product Description	Unmetered 200 Amperes 480 Volt Main Circuit-breaker Lug-lug Breakers White Irrigation Size 4 Starter Standard Unit	Mounting	Pad Mount
UPC	784572791855	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	17.406	Jaw Quantity	0 Terminals
Width (IN)	23.281	Bypass Type	No Bypass
Height (IN)	40.313	Number of Meter Positions	No Meter Provision
Brand Name	Milbank	Equipment Ground	Ground Bar
Type	Unmetered Commercial Pedestal	Hub Opening	No Hub Opening
Application	Power Distribution	Line Side Wire Range	4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil
Standard	UL Listed;Type 3R	Number Of Receptacles	0
Voltage Rating	277/480 Volts Alternating Current		
Amperage Rating	200 Continuous Ampere		
Phase	3 Phase		
Frequency Rating	60 Hertz		
Size	17.406L x 23.281W x 40.313H		
Number Of Cutouts	1		
Cutout Size	One 200 Ampere Main Breaker		
Cable Entry	Underground		
Terminal	Single Mechanical		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.