




MILBANK
ENERGY AT WORK

U4367-XPF-BLG-PSEG

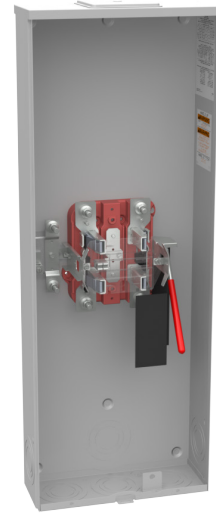

Catalog Number	U4367-XPF-BLG-PSEG	Insulation	Glass Polyester
Marketing Product Description	5 Terminal Ringless Large Closing Plate With 3 In Hub Pack Inside Meter Socket Lever Bypass 7-8 In Barrel Lock Ground With Bracket Provision Public Service Electric And Gas New Jersey	Mounting	Surface Mount
UPC	784572236066	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	4.844	Jaw Quantity	5 Terminal
Width (IN)	13	Bypass Type	Lever Bypass
Height (IN)	35.25	Number of Meter Positions	1 Position
Brand Name	Milbank	Equipment Ground	2 Barrel Ground Lug
Type	Ringless Meter Socket	Hub Opening	Large Closing Plate and 3 Inch Hub Inside Meter Socket
Application	Meter Socket	Barrel Lock Provision	7/8 Inch Knockout and Angle Bracket For Barrel Lock Provision
Standard	UL Listed;Type 3R	Number Of Receptacles	0
Voltage Rating	600 Volts Alternating Current		
Amperage Rating	320 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 13W x 35.25H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead or Underground		
Terminal	3/8 Inch Stud		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.