




# U5794-X-400-5T-CB

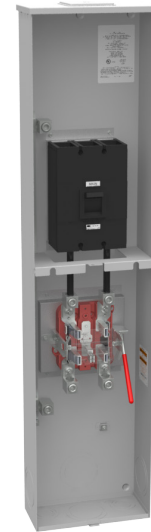

Catalog Number	U5794-X-400-5T-CB
Marketing Product Description	5 Terminal Ringless Large Closing Plate Lever Bypass 1-400 Ampere Main Breaker 5th Terminal 9 Oclock Position 480 Volt Cold Sequence
UPC	784572478978
Length (IN)	6
Width (IN)	13
Height (IN)	56
Brand Name	Milbank
Type	Ringless Meter Socket
Application	Meter Socket With Main
Standard	UL Listed;Type 3R
Voltage Rating	600 Volts Alternating Current
Amperage Rating	320 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	6L x 13W x 56H
Number Of Cutouts	1
Cutout Size	One 400 Ampere Main Breaker
Cable Entry	Overhead
Terminal	Single Mechanical
Insulation	Glass Polyester

Mounting	Surface Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	5 Terminal
Bypass Type	Lever Bypass
Number of Meter Positions	1 Position
Equipment Ground	2 Barrel Ground Lug
Hub Opening	Large Closing Plate
Line Side Wire Range	Two 3/0 AWG - 500 kcmil
Load Side Wire Range	4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil
Number Of Receptacles	0

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.